

Multiboost Slimline: 200ltr & 300ltr

The Multiboost Slimline range can fit through a standard doorway. This makes it very convenient for new or existing properties as it can be easily fitted under a stairs, or in a utility room. The slimline range is ideal for 3 - 5 bedroom houses, with poor water pressure and flow and where floor space is limited.

Key Features

- Non-corrosive holding tank (WRAS approved material)
- Protective lid enclosure as standard
- Minimal installation requirement
- Adjustable LED digital display flow controller
- Dry run protection with auto restart (time delay)
- Start-up pressure 2.5 bar (adjustable)



Variable Speed Option



Overflow → Inlet




Range Options

Product Code	Model
1012150	200ltr Slimline Fixed Speed
1001906	300ltr Slimline Fixed Speed
1001905	300ltr Slimline Variable Speed

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

*Bypass unit recommended to be fitted on inlet supply

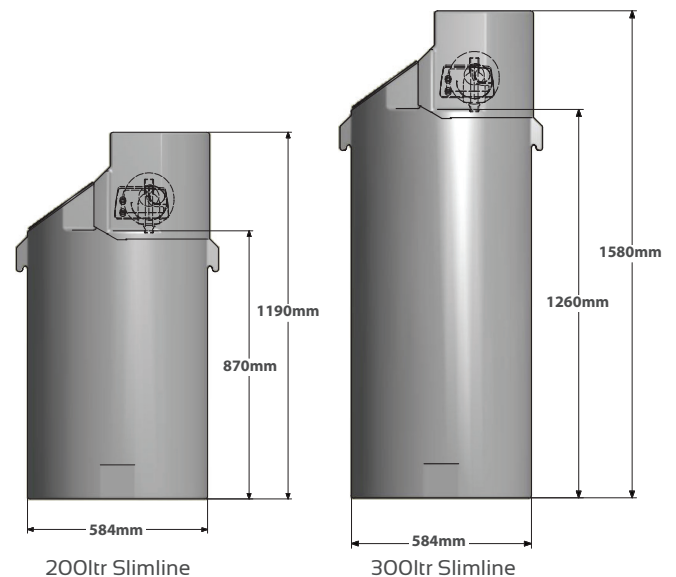

	Fixed Speed Option		Variable Speed Option	
Power supply	240 volt, 50Hz		240 volt, 50Hz	
Pump	Pedrollo TOP Multi 2 (240 volt)		Pedrollo Nkm 2/4 GE-N (240 volt)	
Controller	Presflo Multi with integral 3 litre pressure vessel		Steadypress M/M 8.5amp (D01141091)	
Current Input	3.4 amp		6 amp	
Mains Power Cable	5mtr x 1.5mm ² 3 core		5mtr x 1.5mm ² 3 core	
Pump dB Rating (approx.)	<65dB		<65dB	
Tank Weight Empty	200ltr = 26kg	300ltr = 29kg	200ltr = 33kg	300ltr = 36kg
Tank Weight Full	1ltr of water = 1 kg plus weight of empty tank			
Access Cover Ø	285mm		285mm	

Pump Type	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5
Nkm 2/4 GE-N	0.75	1	H Metres	63	61	59	57	54	50	45	39	31