

Multiboost Utility: 250ltr, 500ltr, 750ltr

The Multiboost Utility range is designed for domestic and light commercial use where there is low mains water pressure and where pressure fluctuates. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed. The Utility range is designed for areas where floor space is not restricted. This range caters for a wider variation of tank options.

Key Features

- Non-corrosive holding tank (WRAS approved material)
- Protective lid enclosure as standard
- Minimal installation requirement
- Adjustable LED digital display flow controller
- Dry run protection with auto restart (time delay)
- Start-up pressure 2.5 bar (adjustable)



Variable Speed Option



Overflow

Inlet




Range Options

Product Code	Model
1001911	250ltr Utility Fixed Speed
1012151	250ltr Utility Variable Speed
1001911	500ltr Utility Fixed Speed
1001912	500ltr Utility Variable Speed
1001916	750ltr Utility Fixed Speed
1012152	750ltr Utility Variable Speed

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

*Bypass unit recommended to be fitted on inlet supply

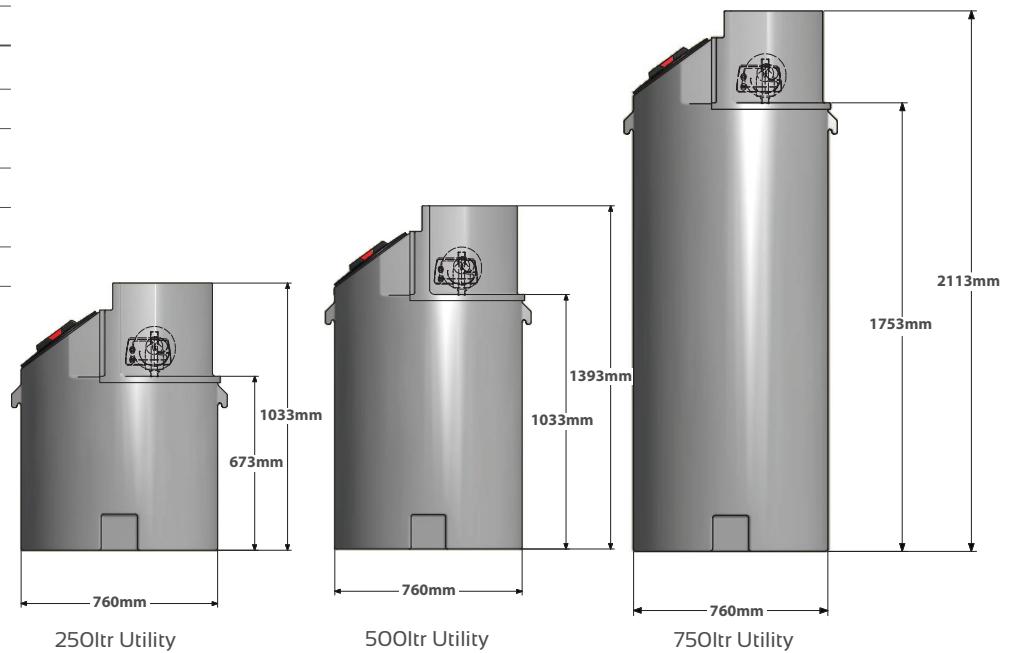

	Fixed Speed Option			Variable Speed Option		
Power supply	240 volt, 50Hz			240 volt, 50Hz		
Pump	Pedrollo TOP Multi 2 (240 volt)			Pedrollo Nkm 2/4 GE-N (240 volt)		
Controller	Presflo Multi with integral 3 litre pressure vessel			Steadypress M/M 8.5amp (D01141091)		
Current Input	3.4 amp			6 amp		
Mains Power Cable	5mtr x 1.5mm ² 3 core			5mtr x 1.5mm ² 3 core		
Pump dB Rating (approx.)	<65dB			<65dB		
Tank Weight Empty	250ltr = 28kg	500ltr = 35kg	750ltr = 46kg	250ltr = 35kg	500ltr = 42kg	750ltr = 53kg
Tank Weight Full	1ltr of water = 1 kg plus weight of empty tank					
Access Cover Ø	285mm			285mm		

Pump Type	Power		Ql/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5
Nkm 2/4 GE-N	0.75	1	H Metres	63	61	59	57	54	50	45	39	31